


DS-QAE0206G1E-V Analog Ceiling Speaker

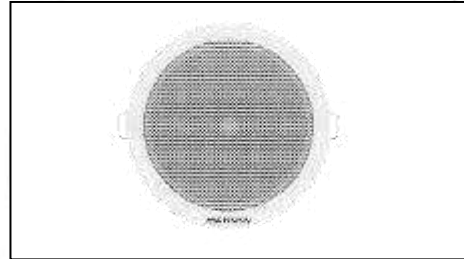

- Adopting a composite paper fiber sound basin, the sound quality is clear and bright
- With the design of powerful steel spring clamp, the installation is fast and safe
- Support ceiling mounting installation with a simple appearance

▪ Specification



Speaker	
Impedance	8 Ω
Speaker Unit	5.25" × 1
Audio	
Rated Power	6 W
Sensitivity	91 dB $\pm$ 3 dB
Max. Acoustic Pressure	98 dB
Frequency Response	90 Hz to 20 kHz
Interface	
Audio In	Rated voltage, 100 V
General	
Material	Shell: ABS; Mesh enclosure: iron mesh
Operating Condition	-20 °C~50 °C (-4 °F to 122 °F), humidity: 95% or less
Dimension	$\varnothing 170 \times 64$ mm ($\varnothing 6.69" \times 2.52"$)
Package Dimension	173.5 × 173.5 × 67 mm (6.83" × 6.83" × 2.64")
Weight	Approx. 468.5 g (1.03 lb.)
With Package Weight	Approx. 534 g (1.18 lb.)
Packing List	Device × 1 Regulatory Compliance and Safety Information × 1
Mounting Hole Dimension	$\varnothing 148$ mm ($\varnothing 5.83"$)

**The device should be used together with amplifier.*

▪ Available Model

DS-QAE0206G1E-V

▪ Dimension

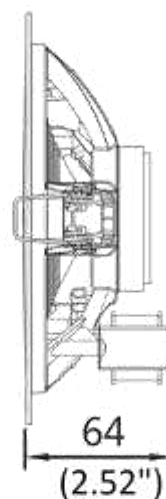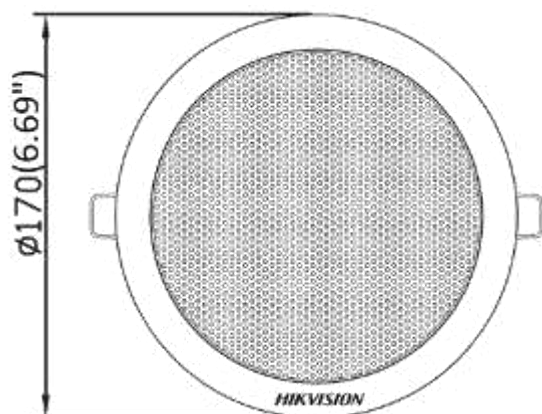

Unit: mm(inch)



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T: +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq