

DS-QAE1A40G1-VB **40 W Network Amplifier**




- Support 40W Rated Power
- Support Single Channel
- Support multiple types of audio source input: Bluetooth, USB flash drive, microphone, and RCA, support 1 constant voltage output, 1 RCA output, 1 alarm input, 1 alarm output
- Support network connection and remote management through the network to achieve functions such as scheduled broadcasting, alarm linkage, TTS, etc

▪ Specification

Function	
Audio Bit Rate	G.711ulaw (64 Kbps) /G.711alaw (64 Kbps) /MP3 (32K~320Kbps)
Protection Function	Short circuit protection, overcurrent protection, over temperature protection, anti-static electricity protection, surge protection, electrical shock protection
Network	
Network Protocol	IPv4, HTTP, HTTPS , SSL/TLS , DNS, NTP, TCP, UDP, IGMP, ICMP, DHCP, ARP, SSH
Interface Protocol (API)	ISAPI, ISUP, RTP
Client	HikCentral Professional
Audio	
Rated Power	40 W
Frequency Response	80 Hz to 20 kHz (±3 dB)
THD and SNR	THD: ≤1% SNR: ≥100 dB
Interface	
Alarm	1 alarm input 1 alarm output
Ethernet Interface	1 RJ45 10 M/100 M adaptive Ethernet port
Local Storage	Built-in 4 GB EMMC (Audio file storage is 1 GB.)
Audio In	MIC 1: -20 dBV, 4 KΩ,unbalance, 6.35 mm jack USB 2.0 × 1 RCA in : 0 dBV, 5 KΩ, unbalance, RCA pin jack Bluetooth
Audio Out	Constant Voltage Output × 1 , 100 V COM RCA Out : 0 dBV, 100 Ω, unbalance, RCA pin jack RCA Cascading: support a cascade of up to 3 amplifiers
LED Indicator	Power indicator (solid white): the device is normally working USB flash drive indicator (solid white): the device is in USB mode Bluetooth indicator (solid blue): the device is in Bluetooth mode
Volume Knob	MIC Volume Knob × 1 , Volume Knob × 1
USB	USB 2.0/3.0. File format: FAT32 and EXFAT, maximum capacity: 128 GB. FAT32 file system: maximum partition size: 128 GB, maximum file size: 4 GB. EXFAT USB flash drives support single files larger than 16 EB.
Power Interface	Aperture size: Ø2.0 mm
General	
Material	Plastic
Dimension	190.8 mm × 230.8 mm × 51.2 mm (7.48" × 9.06" × 2.01")
Package Dimension	362 mm × 280 mm × 100 mm (14.25" × 11.02" × 3.94")
Weight	≈ 1496.2 g (3.3 lb.)
With Package Weight	≈ 2456.2 g (5.4 lb.)
Color	White

Packing List	Device × 1 Power Adapter × 1 Power Cord × 1 Regulatory Compliance and Safety Information × 1
Bluetooth	Bluetooth 5.0 , 10 m
Operating Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Operating Humidity	< 90% (No condensation)
Power Consumption	Standby Consumption: 4.5 W Annual Average Consumption: Max. Working Consumption: 90 W (based on the average playing time)


▪ Wiring

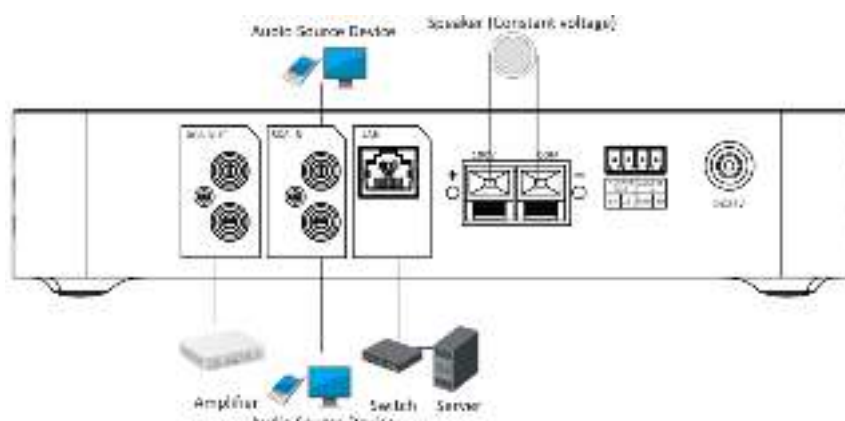

▪ Available Model

DS-QAE1A40G1-VB

▪ Dimension

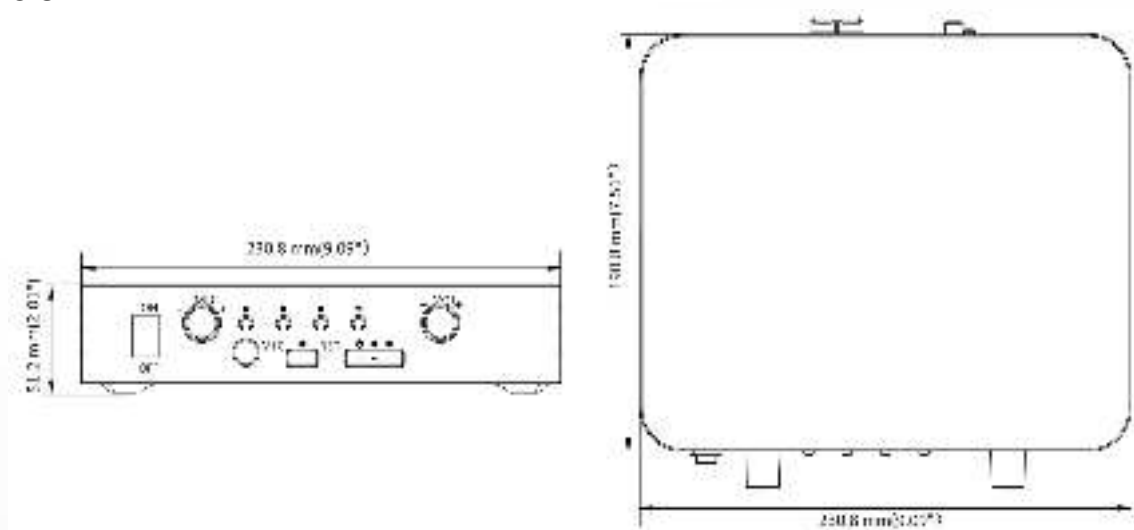

See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION