

DS-QAZ0110G1-S
10 W Secondary Speaker

- Connect to the primary speaker to help boost the volume of sound.


▪ Specification

Speaker	
Rated Power	10 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	90 dB
Direction	All directions
Max. Acoustic Pressure	98 dBSPL
Frequency Response	100 Hz to 20 kHz
Interface	
Audio In	Fixed resistance input $\times 1$, 8 Ω
General	
Material	Wooden
Operating Temperature	-10 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (14 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$)
Operating Humidity	< 90% (No condensation)
Dimension	180.6 mm $\times$ 156 mm $\times$ 280 mm(7.11" $\times$ 6.14" $\times$ 11.02")
Package Dimension	260 mm $\times$ 250 mm $\times$ 220 mm(10.24" $\times$ 9.84" $\times$ 8.66")
Weight	Approx. 0.4 kg (0.88 lb.)
With Package Weight	Approx. 0.5 kg (1.1 lb.)
Color	Black
Packing List	Device $\times 1$ Screw pack $\times 1$ Installation sticker $\times 1$ Regulatory Compliance and Safety Information $\times 1$

▪ Available Model

DS-QAZ0110G1-S

▪ Dimension

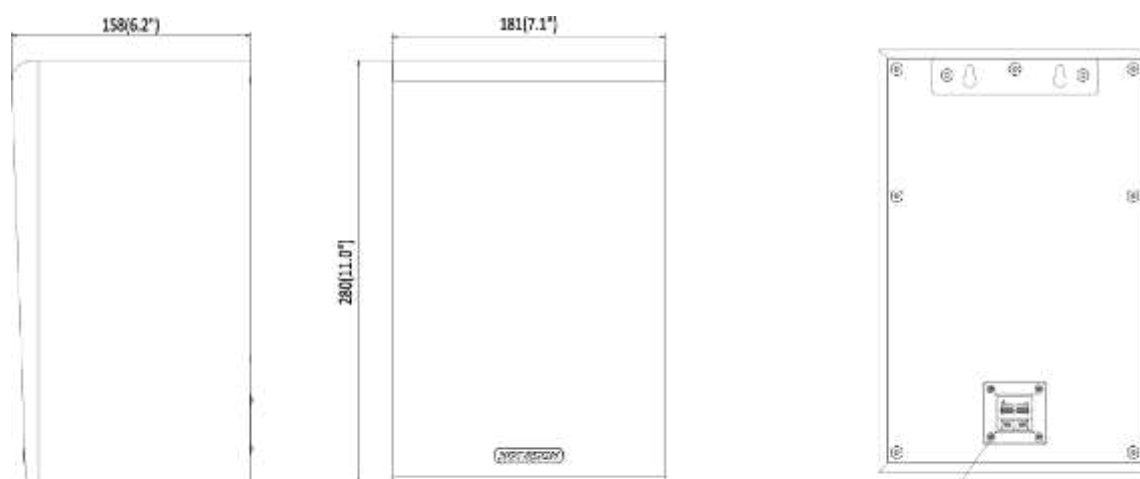

Unit: mm (inch)

Rated
Resistance
Input Port

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T: +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

[Hikvision](#)[HikvisionHQ](#)[HikvisionHQ](#)[Hikvision_Global](#)[Hikvision
Corporate Channel](#)[hikvisionhq](#)