

## **DS-QAZ0203G1-S** **3 W Ceiling Secondary Speaker**




- Full frequency 5" × 1
- Rated Power: 3W
- Sensitivity(1 m, 1 W): 93 dB
- Max. SPL: 97 dB
- Frequency Response: 300 Hz to 15 kHz
- Support schedule/live/emergency broadcast; alarm linkage; TTS
- White


## ▪ Specification

| Speaker                 |                                                                                                                                                                   |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated Power             | 3 W                                                                                                                                                               |
| Impedance               | 8 $\Omega$                                                                                                                                                        |
| Direction               | All directions                                                                                                                                                    |
| Sensitivity(1 m, 1 W)   | 93 dB                                                                                                                                                             |
| Max. Acoustic Pressure  | 97 dBSPL                                                                                                                                                          |
| Frequency Response      | 300 Hz to 15 kHz                                                                                                                                                  |
| SNR                     | 82 dB                                                                                                                                                             |
| Coverage Angle          | Conical Coverage: 130°                                                                                                                                            |
| Interface               |                                                                                                                                                                   |
| Audio In                | Fixed resistance input $\times 1$ , 8 $\Omega$<br>*The primary speaker(3 W, 8 $\Omega$ ) can be connected to a maximum of 3 secondary speakers(3 W, 8 $\Omega$ ). |
| General                 |                                                                                                                                                                   |
| Operating Temperature   | 10 °C to 50 °C                                                                                                                                                    |
| Material                | Device body: plastic; Mesh cover: metal                                                                                                                           |
| Dimension               | $\varnothing 179$ mm $\times$ 77.5 mm ( $\varnothing 7.05$ " $\times$ 3.05") (Hole Size: 160 mm)                                                                  |
| Package Dimension       | 255 mm $\times$ 243 mm $\times$ 175 mm (10.04" $\times$ 9.57" $\times$ 6.89")                                                                                     |
| Weight                  | Approx. 0.3 kg (0.66 lb.)                                                                                                                                         |
| With Package Weight     | Approx. 0.45 kg (0.99 lb.)                                                                                                                                        |
| Color                   | White                                                                                                                                                             |
| Operating Humidity      | < 90% (No condensation)                                                                                                                                           |
| Packing List            | Device $\times 1$<br>Mesh cover $\times 1$<br>Regulatory Compliance and Safety Information $\times 1$                                                             |
| Mounting Hole Dimension | $\varnothing 160$ mm (6.30")                                                                                                                                      |
| Mounting Depth          | 91 mm (3.58")                                                                                                                                                     |

## ▪ Wiring

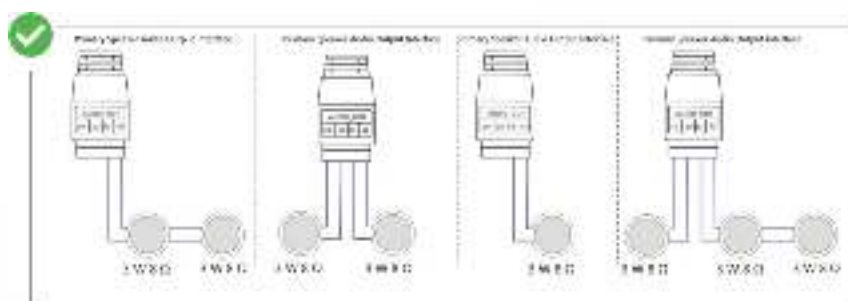

## ▪ Dimension

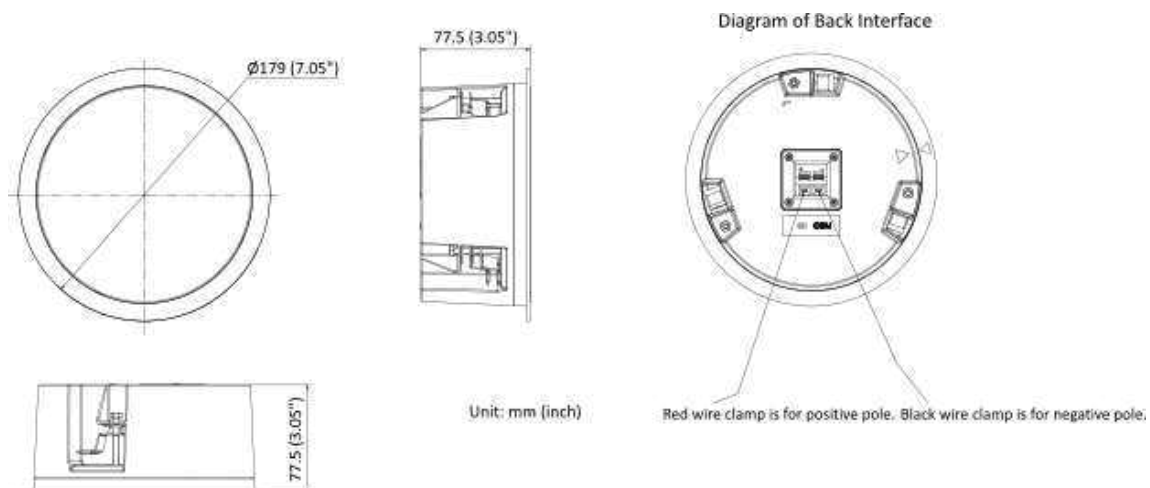

- **Accessory**
- **Optional**

#### DS-QAZ1203G1-BE



See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION**