

DS-QAZ0206G1-S **Ceiling Secondary Speaker 6W**




- Full frequency 5" × 1
- Rated Power: 6 W
- Sensitivity(1 m, 1 W): 93 dB
- Max. SPL: 100 dB
- Frequency Response: 300 Hz to 15 kHz
- Support schedule/live/emergency broadcast; alarm linkage; TTS
- White


▪ Specification

Speaker	
Rated Power	6 W
Impedance	8 Ω
Sensitivity(1 m, 1 W)	93 dB
Max. Acoustic Pressure	100 dBSPL
Direction	All directions
Frequency Response	300 Hz to 15 kHz
SNR	82 dB
Coverage Angle	Conical Coverage: 130°
Interface	
Audio In	Fixed resistance input $\times 1$, 8 Ω *The primary speaker(6 W, 8 Ω) can be connected to a maximum of 1 secondary speaker(6 W, 8 Ω).
General	
Operating Temperature	10 °C to 50 °C
Material	Device body: plastic; Mesh cover: metal
Dimension	$\varnothing 179$ mm $\times$ 77.5 mm ($\varnothing 7.05$ " $\times$ 3.05") (Hole Size: 160 mm)
Package Dimension	255 mm $\times$ 243 mm $\times$ 175 mm (10.04" $\times$ 9.57" $\times$ 6.89")
Weight	Approx. 0.3 kg (0.66 lb.)
With Package Weight	Approx. 0.45 kg (0.99 lb.)
Color	White
Operating Humidity	< 90% (No condensation)
Packing List	Device $\times$ 1 Mesh cover $\times$ 1 Regulatory Compliance and Safety Information $\times$ 1
Mounting Hole Dimension	$\varnothing 160$ mm (6.30")
Mounting Depth	91 mm (3.58")

▪ Wiring

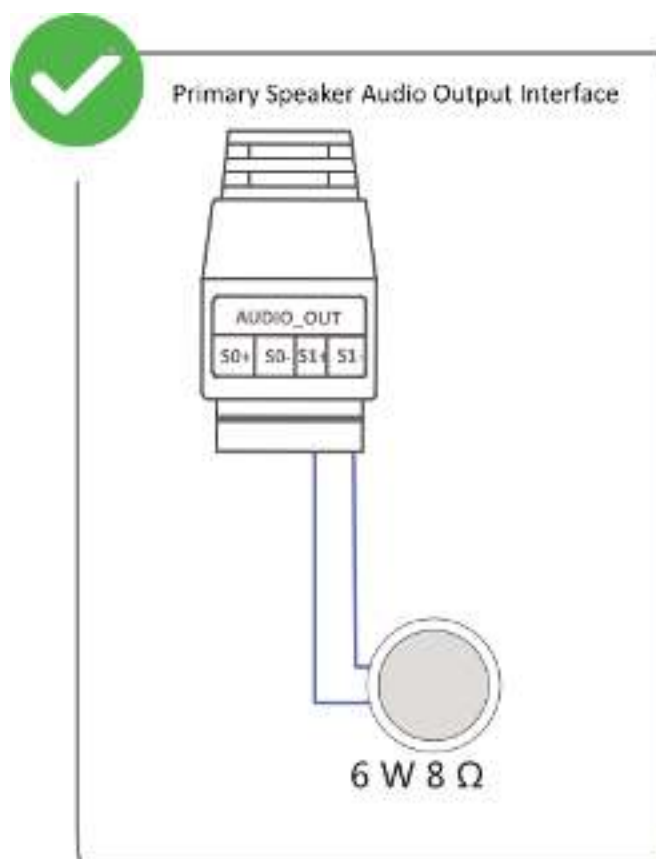

▪ Dimension

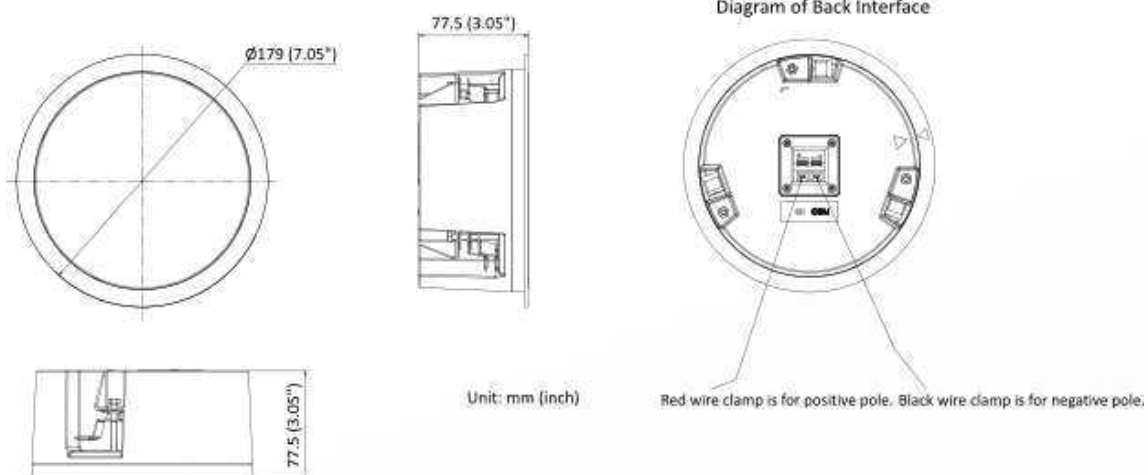

▪ Accessory

▪ Optional

DS-QAZ1206G1-BE



See Far, Go Further



www.hikvision.com
support@hikvision.com



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION