



Brief Introduction

GL300W equipped with Wi-Fi communication and supports a 4-in-1 access mode. Users can unlock/lock the door by mobile phone, fingerprint, passcode or IC card. In addition, GL300W offers remote unlock function, traces access records and manages users via ZSmart APP on mobile phone without time and place constraints.

Features



Door Bell Ring

Built-in electronic doorbell



Emergency Charging Port

Charging with a power bank via the micro-USB port to jump-start the lock in emergency



Remote Control

Unlock and manage the lock with the App



Capacitive Fingerprint Sensor

Fast verification for dry and rough fingers



Random Passcode

Add random digits to protect your passcode from prying eyes



Temporary Access

Share digital keys valid for specific time to friends or guests



Low Battery Warning

Alert the master to replace batteries



Audio Instructions

User-friendly audio prompts, support English and Chinese



Wi-Fi Communication

Ensure a fast and stable connection




NFC

Bind the IC card to your mobile wallet, and unlock your door with your smartphone or your IC card. No worries about misplacing your IC card


Mobile Application




ZSmart App

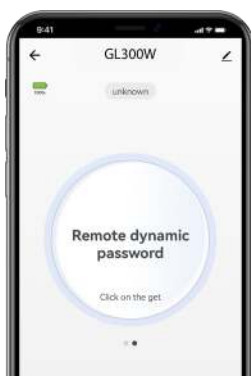


App Control

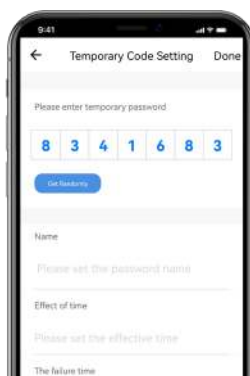

Share Temporary Password

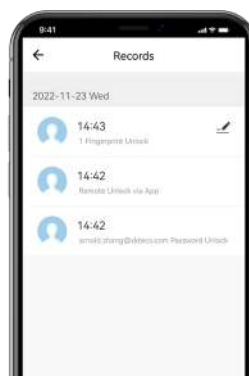

Check Records

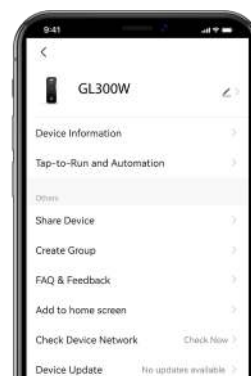


Lock Setup


Specifications

Case Material	Zinc Alloy + ABS Plastic
Keyless Authentication Methods	Smartphone, Fingerprint, Passcode, IC Card, NFC
Glass Door Thickness	35mm to 70mm
Door Types	Sliding Wooden Door/Broken Bridge Aluminum Sliding Glass Door/ Broken Bridge Aluminum Swing Doors/ Wooden Swing Doors
Communication	Wi-Fi IEEE 802.11b/g/n20
User Capacity	Fingerprint: 100 Passcode: 100 IC Card: 100
Transaction	20,000
Fingerprint Sensor	Semiconductor
Power Supply	4 × AA Alkaline Batteries (not included)
Battery Life	Up to 1 year
Backup Power Interface	Micro-USB
Dimensions (L*W*D)	200 mm*80mm*75(mm)
Net Weight	1.4Kg
Weight with Packaging	1.6Kg
Operating Temperature	-25°C~65°C
Operating Humidity	5% RH ~95% RH
Certification(s)	FCC
Color Option(s)	Black


Suitable Door Types

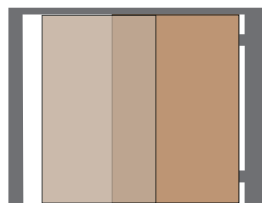


Sliding Wooden Door



Broken Bridge Aluminum Sliding Glass Door

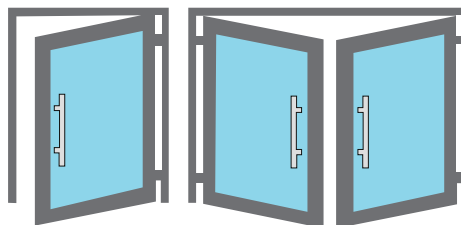

Broken Bridge Aluminum Swing Doors



Wooden Swing Doors

* Note: the width of the stile is $\geq 60\text{mm}$.

Dimension(mm)

